


# SL-360 Size: AA

> Standard use and stand-by


### Performance Data

(Typical values for batteries stored at +25 °C for one year)


System	Lithium Thionyl Chloride
Nominal voltage	3.6 V
Nominal capacity	2.4 Ah
Nominal current	2 mA
Max. continuous discharge current	20 mA
Anode surface area	14 cm <sup>2</sup>
Lithium content	0.65 g
Weight	18 g
Volume	8 cm <sup>3</sup>
Temperature range	-55 °C ... +85 °C

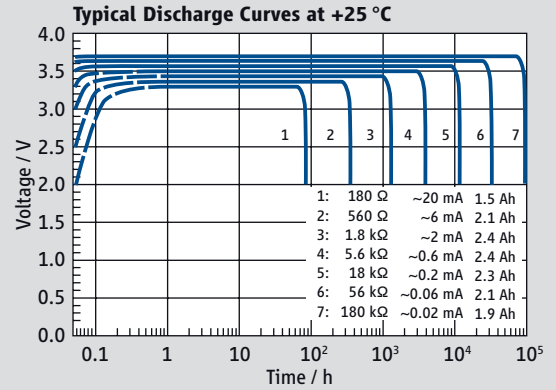


### SL-360/S

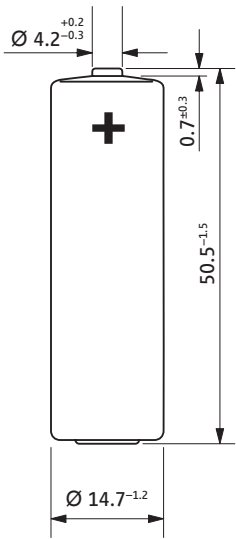


### SL-360/T






### SL-360/P

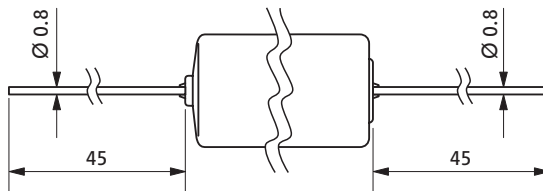

### SL-360/PR



### SL-360/PT

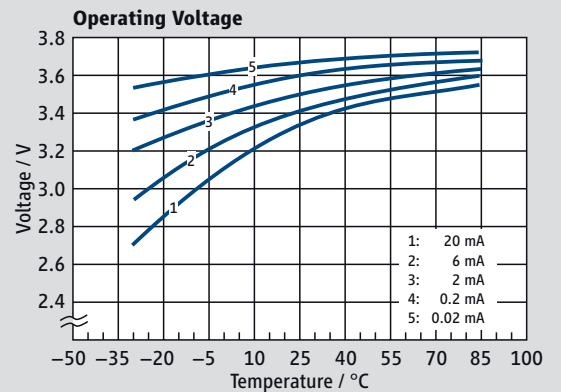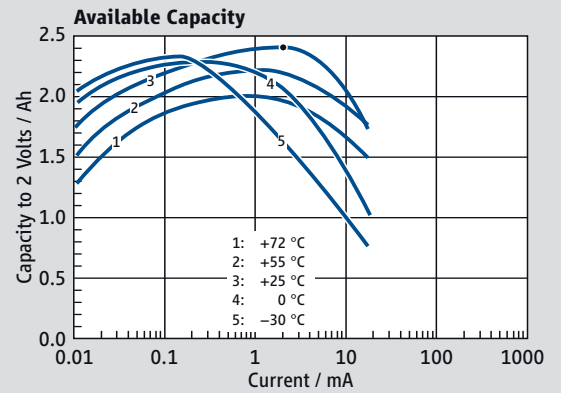

### Available Terminations

Termination	Catalogue No.
SL-360/S	Standard 11 1 03601 00
SL-360/T	Tags 11 1 03602 00
SL-360/P	Pins 11 1 03603 00
SL-360/PR	Pins radial 11 1 03606 00
SL-360/PT	Polarized tags 11 1 03608 00

**WARNING:**  
Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.