

Back Nut




SD28插座系列及代号与尺寸图

外壳
结构形式

后螺母插座

代号

ZM

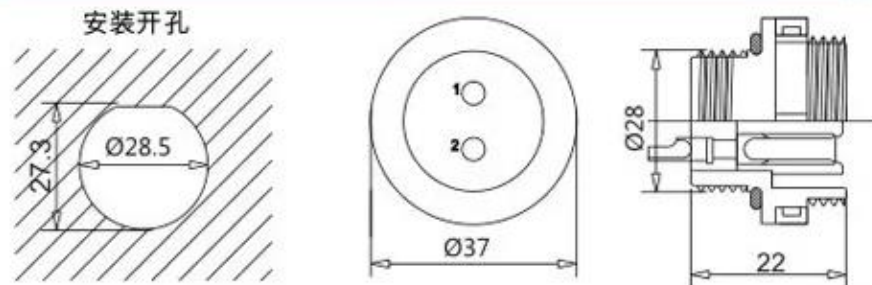


外壳
结构形式

直式带电缆紧固插头

代号

TP

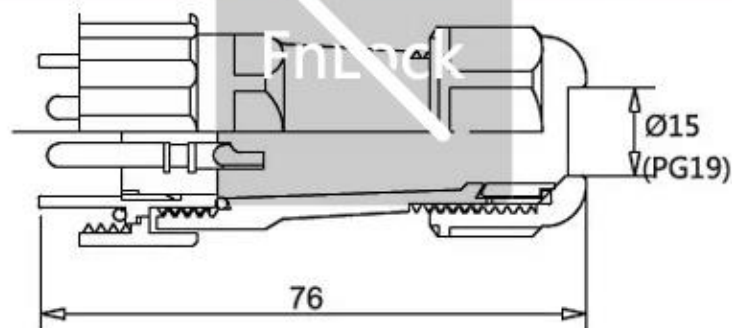

SP28	2	3	4	5	6	7	9	
Male contact face view								
Contact diameter	3.6x2	3.6x3	3.6x4	2.8x5	2.8x6	2.8x7	1.8x9	
Rated current(A)	45A	45A	45A	25A	25A	25A	10A	
Rated voltage(AC.V)	250V	250V	250V	250V	250V	250V	250V	
Test voltage(AC.V)	1500V	1500V	1500V	1500V	1500V	1500V	1500V	
Contact resistance(mΩ)	0.5	0.5	0.5	1	1	1	2	
Insulation resistance(mΩ)	2000	2000	2000	2000	2000	2000	2000	
Copper wire square(mm²)	≤10.17	≤10.17	≤10.17	≤6.15	≤6.15	≤6.15	≤2.54	
SP28	10	12	14	16	19	22	24	26
Male contact face view								
Contact diameter	1.8x10	1.8x12	1.8x14	1.8x16	1x19	1x22	1x24	1x26
Rated current(A)	10A	10A	10A	10A	5A	5A	5A	5A
Rated voltage(AC.V)	250V	250V	250V	250V	250V	250V	250V	250V
Test voltage(AC.V)	1500V	1500V	1500V	1500V	1500V	1500V	1500V	1500V
Contact resistance(mΩ)	2	2	2	2	5	5	5	5
Insulation resistance(mΩ)	2000	2000	2000	2000	2000	2000	2000	2000
Copper wire square(mm²)	≤2.54	≤2.54	≤2.54	≤2.54	≤0.78	≤0.78	≤0.78	≤0.78