


## Cree® XLamp® XM-L2 LEDs



### PRODUCT DESCRIPTION

The XLamp® XM-L2 LED builds on the unprecedented performance of the original XM-L, increasing lumen output up to 20% while providing a single die LED point source for precise optical control. The XM-L2 LED shares the same mechanical and optical footprint as the original XM-L, providing a seamless upgrade path and shortened design cycle.

XLamp XM-L2 LEDs are the ideal choice for lighting applications where high light output and maximum efficacy are required, such as LED light bulbs, outdoor lighting, portable lighting, indoor lighting and solar-powered lighting.

### FEATURES

- Available in white, 80-CRI white, 85-CRI white and 90-CRI white
- ANSI-compatible chromaticity bins
- Binned at 85 °C
- Maximum drive current: 3000 mA
- Low thermal resistance: 2.5 °C/W
- Wide viewing angle: 125°
- Unlimited floor life at ≤ 30 °C/85% RH
- Reflow solderable - JEDEC J-STD-020C
- Electrically neutral thermal path
- RoHS- and REACH-compliant
- UL-recognized component (E349212)



### TABLE OF CONTENTS

|                                                         |    |
|---------------------------------------------------------|----|
| Characteristics .....                                   | 2  |
| Flux Characteristics.....                               | 3  |
| Relative Spectral Power Distribution.....               | 4  |
| Relative Flux vs. Junction Temperature .....            | 4  |
| Electrical Characteristics .....                        | 5  |
| Relative Flux vs. Current .....                         | 5  |
| Relative Chromaticity vs. Current (Warm White) .....    | 6  |
| Relative Chromaticity vs. Temperature (Warm White)..... | 6  |
| Typical Spatial Distribution.....                       | 7  |
| Thermal Design .....                                    | 7  |
| Reflow Soldering Characteristics ..                     | 8  |
| Notes.....                                              | 9  |
| Mechanical Dimensions.....                              | 10 |
| Tape and Reel .....                                     | 11 |
| Packaging.....                                          | 12 |

## CHARACTERISTICS

| Characteristics                              | Unit    | Minimum | Typical | Maximum |
|----------------------------------------------|---------|---------|---------|---------|
| Thermal resistance, junction to solder point | °C/W    |         | 2.5     |         |
| Viewing angle (FWHM)                         | degrees |         | 125     |         |
| Temperature coefficient of voltage           | mV/°C   |         | -1.6    |         |
| ESD withstand voltage (HBM per Mil-Std-883D) | V       |         |         | 8000    |
| DC forward current                           | mA      |         |         | 3000    |
| Reverse voltage                              | V       |         |         | -5      |
| Forward voltage (@ 700 mA, 85 °C)            | V       |         | 2.85    | 3.15    |
| Forward voltage (@ 1500 mA, 85 °C)           | V       |         | 3.05    |         |
| Forward voltage (@ 3000 mA, 85 °C)           | V       |         | 3.3     |         |
| LED junction temperature                     | °C      |         |         | 150     |

## FLUX CHARACTERISTICS (T<sub>j</sub> = 85 °C)


The following table provides several base order codes for XLamp XM-L2 LEDs. It is important to note that the base order codes listed here are a subset of the total available order codes for the product family. For more order codes, as well as a complete description of the order-code nomenclature, please consult the XLamp XM LED Family Binning and Labeling document.

| Color         | CCT Range |        | Base Order Codes<br>Min. Luminous Flux (lm)<br>@ 700 mA |                      |                       | Calculated Minimum<br>Luminous Flux (lm)<br>@ 85 °C** |         |         | Order Code               |
|---------------|-----------|--------|---------------------------------------------------------|----------------------|-----------------------|-------------------------------------------------------|---------|---------|--------------------------|
|               | Min.      | Max.   | Group                                                   | Flux (lm)<br>@ 85 °C | Flux (lm)<br>@ 25 °C* | 1000 mA                                               | 1500 mA | 2000 mA |                          |
| Cool White    | 5000 K    | 8300 K | T5                                                      | 260                  | 296                   | 357                                                   | 502     | 631     | XMLBWT-00-0000-0000T5051 |
|               |           |        | T6                                                      | 280                  | 318                   | 385                                                   | 541     | 679     | XMLBWT-00-0000-0000T6051 |
|               |           |        | U2                                                      | 300                  | 341                   | 412                                                   | 580     | 728     | XMLBWT-00-0000-0000U2051 |
| Neutral White | 3700 K    | 5000 K | T4                                                      | 240                  | 273                   | 330                                                   | 464     | 582     | XMLBWT-00-0000-000LT40E4 |
|               |           |        | T5                                                      | 260                  | 296                   | 357                                                   | 502     | 631     | XMLBWT-00-0000-000LT50E4 |
|               |           |        | T6                                                      | 280                  | 318                   | 385                                                   | 541     | 679     | XMLBWT-00-0000-000LT60E4 |
| Warm White    | 2600 K    | 3700 K | T2                                                      | 200                  | 227                   | 275                                                   | 386     | 485     | XMLBWT-00-0000-000LT20E7 |
|               |           |        | T3                                                      | 220                  | 250                   | 302                                                   | 425     | 534     | XMLBWT-00-0000-000LT30E7 |
|               |           |        | T4                                                      | 240                  | 273                   | 330                                                   | 464     | 582     | XMLBWT-00-0000-000LT40E7 |
| 80-CRI White  | 2600 K    | 4300 K | T2                                                      | 200                  | 227                   | 275                                                   | 386     | 485     | XMLBWT-00-0000-000HT20E7 |
|               |           |        | T3                                                      | 220                  | 250                   | 302                                                   | 425     | 534     | XMLBWT-00-0000-000HT30E7 |
|               |           |        | T4                                                      | 240                  | 273                   | 330                                                   | 464     | 582     | XMLBWT-00-0000-000HT40E7 |
|               |           |        | T5                                                      | 260                  | 296                   | 357                                                   | 502     | 631     | XMLBWT-00-0000-000HT50E7 |
| 85-CRI White  | 2600 K    | 3200 K | S4                                                      | 164                  | 186                   | 225                                                   | 317     | 398     | XMLBWT-00-0000-000PS40E7 |
|               |           |        | S5                                                      | 172                  | 196                   | 236                                                   | 332     | 417     | XMLBWT-00-0000-000PS50E7 |
|               |           |        | S6                                                      | 182                  | 207                   | 250                                                   | 352     | 442     | XMLBWT-00-0000-000PS60E7 |
|               |           |        | T2                                                      | 200                  | 227                   | 275                                                   | 386     | 485     | XMLBWT-00-0000-000PT20E7 |
| 90-CRI White  | 2600 K    | 3200 K | S4                                                      | 164                  | 186                   | 225                                                   | 317     | 398     | XMLBWT-00-0000-000US40E7 |
|               |           |        | S5                                                      | 172                  | 196                   | 236                                                   | 332     | 417     | XMLBWT-00-0000-000US50E7 |
|               |           |        | S6                                                      | 182                  | 207                   | 250                                                   | 352     | 442     | XMLBWT-00-0000-000US60E7 |
|               |           |        | T2                                                      | 200                  | 227                   | 275                                                   | 386     | 485     | XMLBWT-00-0000-000UT20E7 |


### Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.
- Typical CRI for Cool White (5000 K – 8300 K CCT) is 65.
- Typical CRI for Neutral White (3700 K – 5000 K CCT) is 75.
- Typical CRI for Warm White (2600 K – 3700 K CCT) is 80.
- Minimum CRI for 80-CRI White is 80.
- Minimum CRI for 85-CRI White is 85.
- Minimum CRI for 90-CRI White is 90.
- \* Flux values @ 25 °C are calculated and are for reference only.
- \*\* Calculated flux values at 1000 mA, 1500 mA and 2000 mA are for reference only.


## RELATIVE SPECTRAL POWER DISTRIBUTION

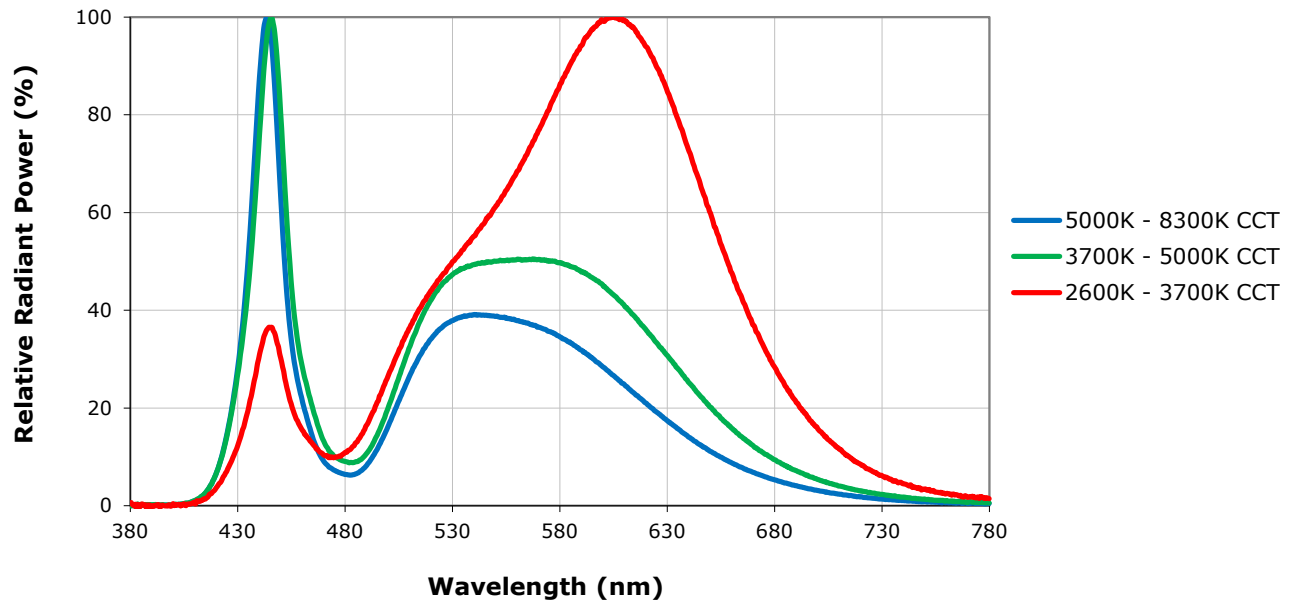


## RELATIVE FLUX VS. JUNCTION TEMPERATURE ( $I_F = 700$ mA)

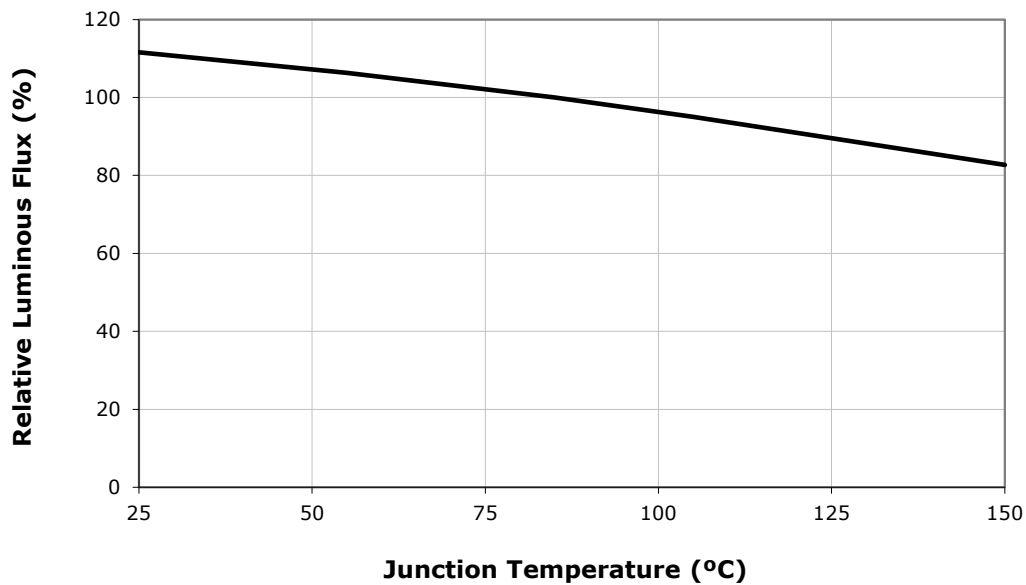


## ELECTRICAL CHARACTERISTICS ( $T_j = 85\text{ }^{\circ}\text{C}$ )

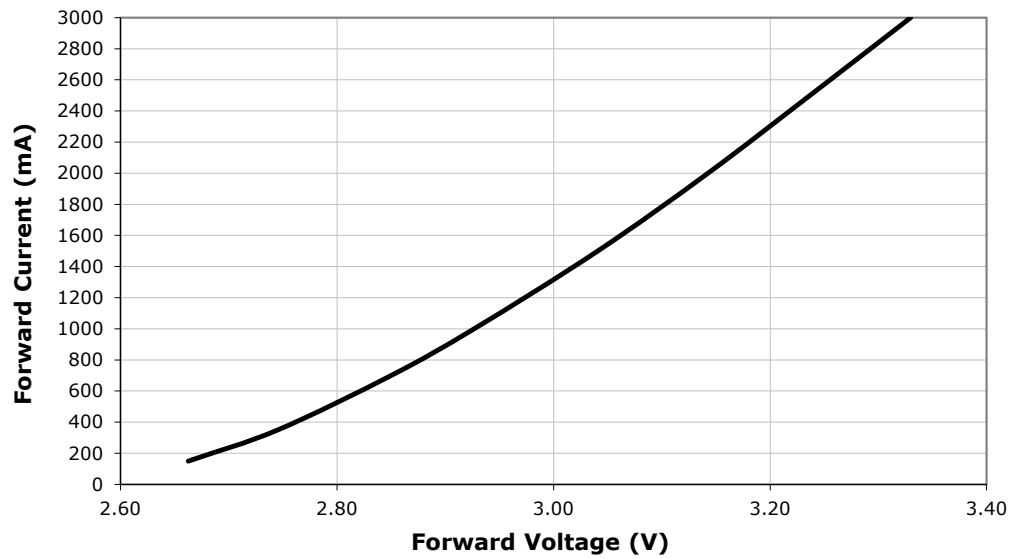


## RELATIVE FLUX VS. CURRENT ( $T_j = 85\text{ }^{\circ}\text{C}$ )

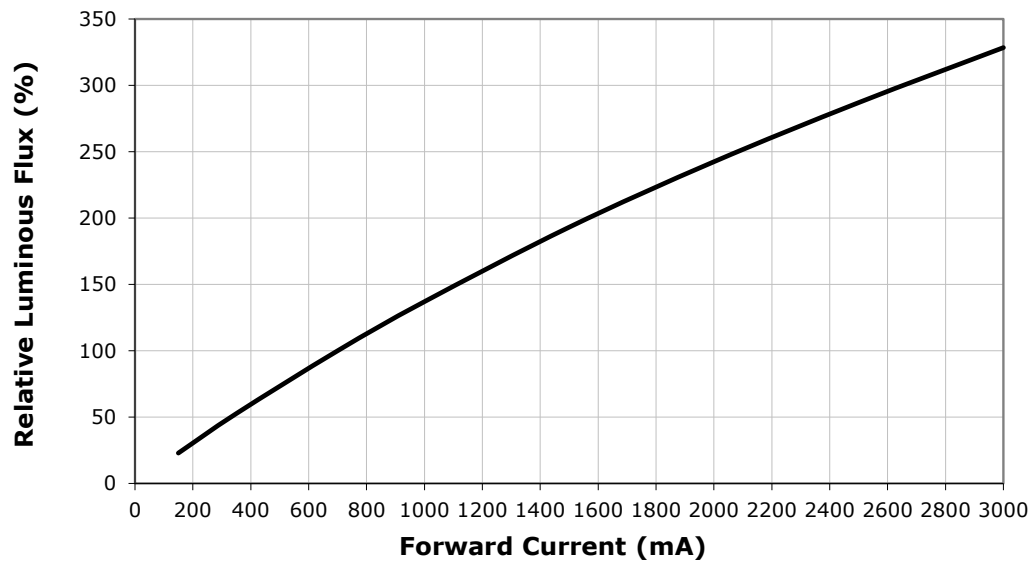


## RELATIVE CHROMATICITY VS. CURRENT (WARM WHITE)

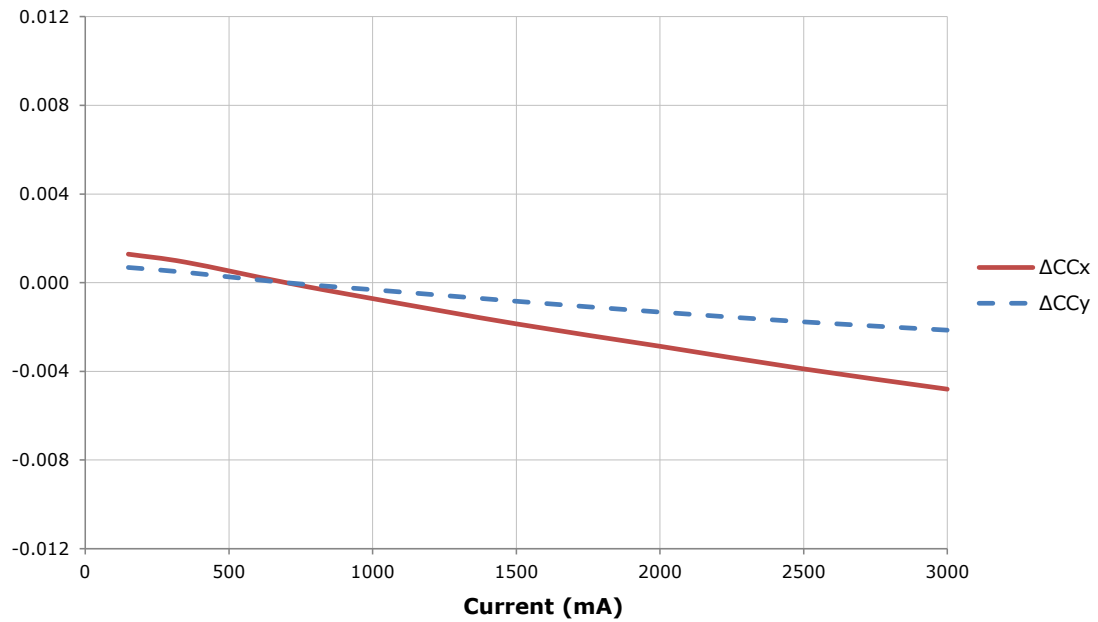

## RELATIVE CHROMATICITY VS. TEMPERATURE (WARM WHITE)

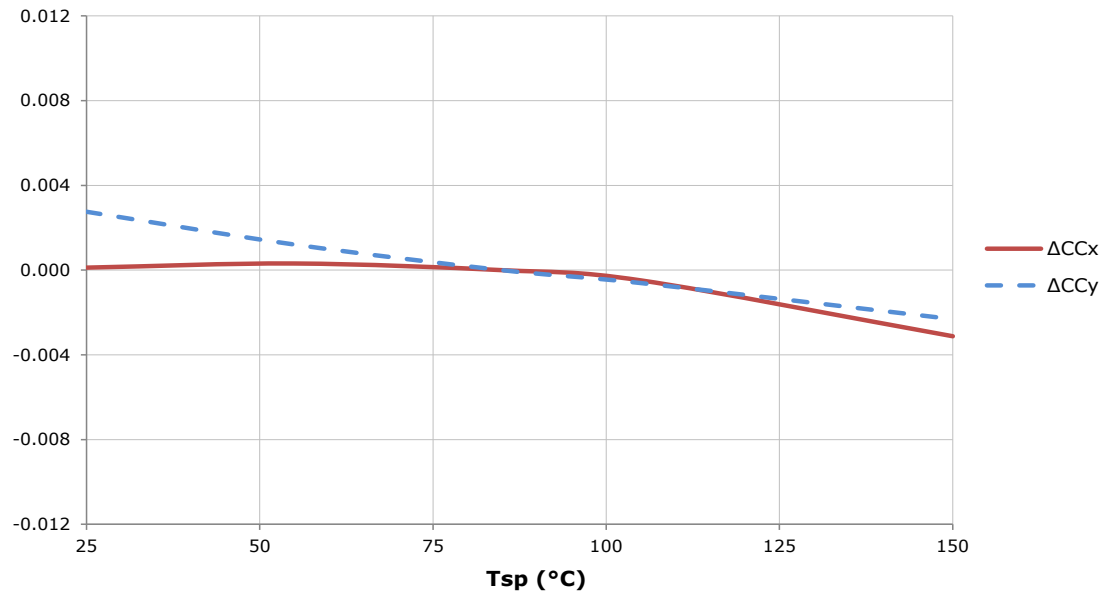


## TYPICAL SPATIAL DISTRIBUTION

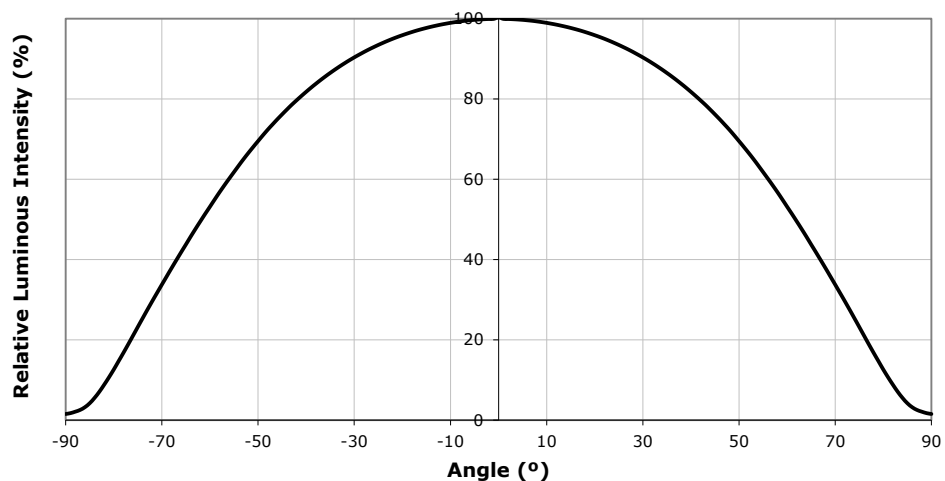

## THERMAL DESIGN


The maximum forward current is determined by the thermal resistance between the LED junction and ambient. It is crucial for the end product to be designed in a manner that minimizes the thermal resistance from the solder point to ambient in order to optimize lamp life and optical characteristics.

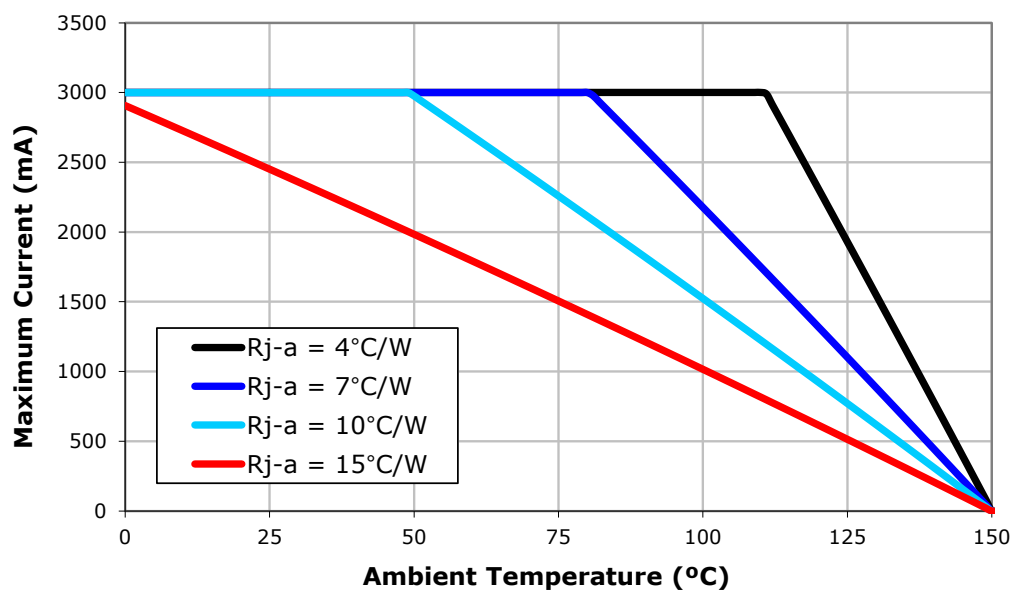

## REFLOW SOLDERING CHARACTERISTICS

In testing, Cree has found XLamp XM-L2 LEDs to be compatible with JEDEC J-STD-020C, using the parameters listed below. As a general guideline, Cree recommends that users follow the recommended soldering profile provided by the manufacturer of solder paste used.

Note that this general guideline may not apply to all PCB designs and configurations of reflow soldering equipment.

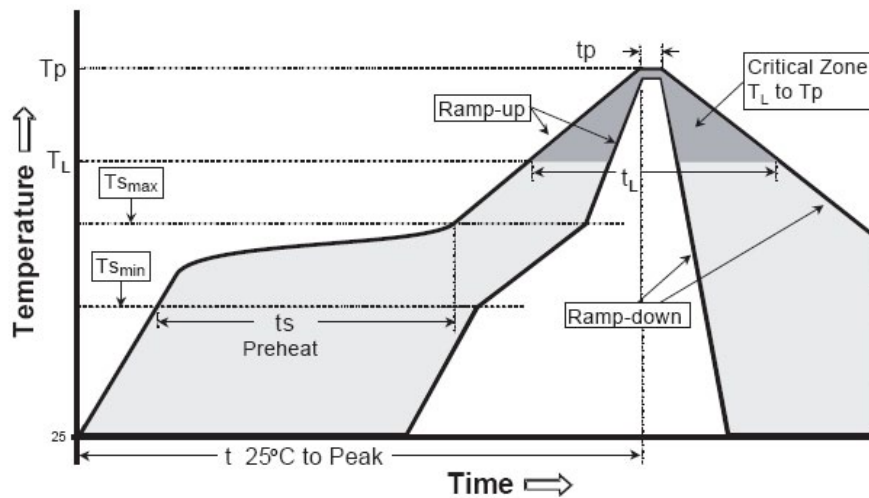

IPC/JEDEC J-STD-020C

| Profile Feature                                       | Lead-Based Solder | Lead-Free Solder |
|-------------------------------------------------------|-------------------|------------------|
| Average Ramp-Up Rate ( $T_{smax}$ to $T_p$ )          | 3 °C/second max.  | 3 °C/second max. |
| Preheat: Temperature Min ( $T_{smin}$ )               | 100 °C            | 150 °C           |
| Preheat: Temperature Max ( $T_{smax}$ )               | 150 °C            | 200 °C           |
| Preheat: Time ( $t_{smin}$ to $t_{smax}$ )            | 60-120 seconds    | 60-180 seconds   |
| Time Maintained Above: Temperature ( $T_L$ )          | 183 °C            | 217 °C           |
| Time Maintained Above: Time ( $t_L$ )                 | 60-150 seconds    | 60-150 seconds   |
| Peak/Classification Temperature ( $T_p$ )             | 215 °C            | 260 °C           |
| Time Within 5 °C of Actual Peak Temperature ( $t_p$ ) | 10-30 seconds     | 20-40 seconds    |
| Ramp-Down Rate                                        | 6 °C/second max.  | 6 °C/second max. |
| Time 25 °C to Peak Temperature                        | 6 minutes max.    | 8 minutes max.   |

Note: All temperatures refer to the topside of the package, measured on the package body surface.



## NOTES

### Lumen Maintenance Projections

Cree now uses standardized IES LM-80-08 and TM-21-11 methods for collecting long-term data and extrapolating LED lumen maintenance. For information on the specific LM-80 data sets available for this LED, refer to the public [LM-80 results document](#).

Please read the [Long-Term Lumen Maintenance application note](#) for more details on Cree's lumen maintenance testing and forecasting. Please read the [Thermal Management application note](#) for details on how thermal design, ambient temperature, and drive current affect the LED junction temperature.

### Moisture Sensitivity

In testing, Cree has found XLamp XM-L2 LEDs to have unlimited floor life in conditions  $\leq 30^{\circ}\text{C}/85\%$  relative humidity (RH). Moisture testing included a 168-hour soak at  $85^{\circ}\text{C}/85\%$  RH followed by 3 reflow cycles, with visual and electrical inspections at each stage.

Cree recommends keeping XLamp LEDs in their sealed moisture-barrier packaging until immediately prior to use. Cree also recommends returning any unused LEDs to the resealable moisture-barrier bag and closing the bag immediately after use.

### RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Cree representative or from the Product Documentation sections of [www.cree.com](http://www.cree.com).

### REACH Compliance

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a Cree representative to insure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

### UL Recognized Component


Level 4 enclosure consideration. The LED package or a portion thereof has been investigated as a fire and electrical enclosure per ANSI/UL 8750.

### Vision Advisory Claim

WARNING: Do not look at exposed lamp in operation. Eye injury can result. For more information about LEDs and eye safety, please refer to the [LED Eye Safety application note](#).

## MECHANICAL DIMENSIONS


All measurements are  $\pm .13$  mm unless otherwise indicated.

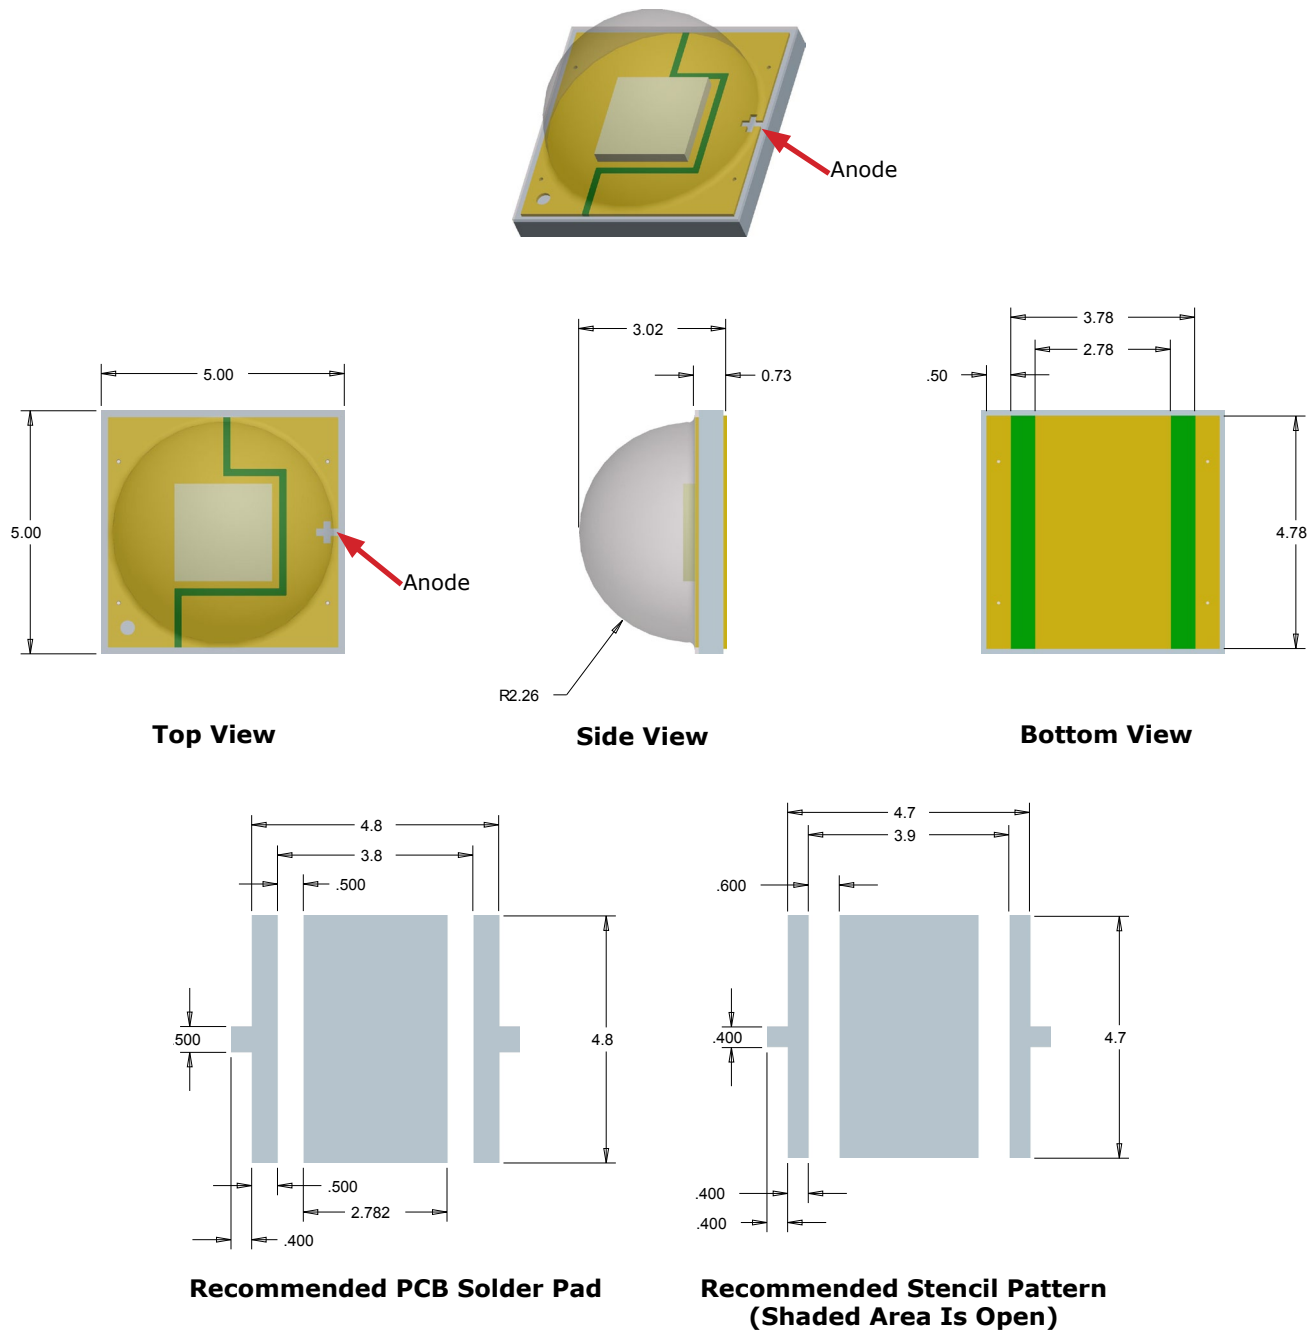

## TAPE AND REEL


All Cree carrier tapes conform to EIA-481D, Automated Component Handling Systems Standard.

All dimensions in mm.

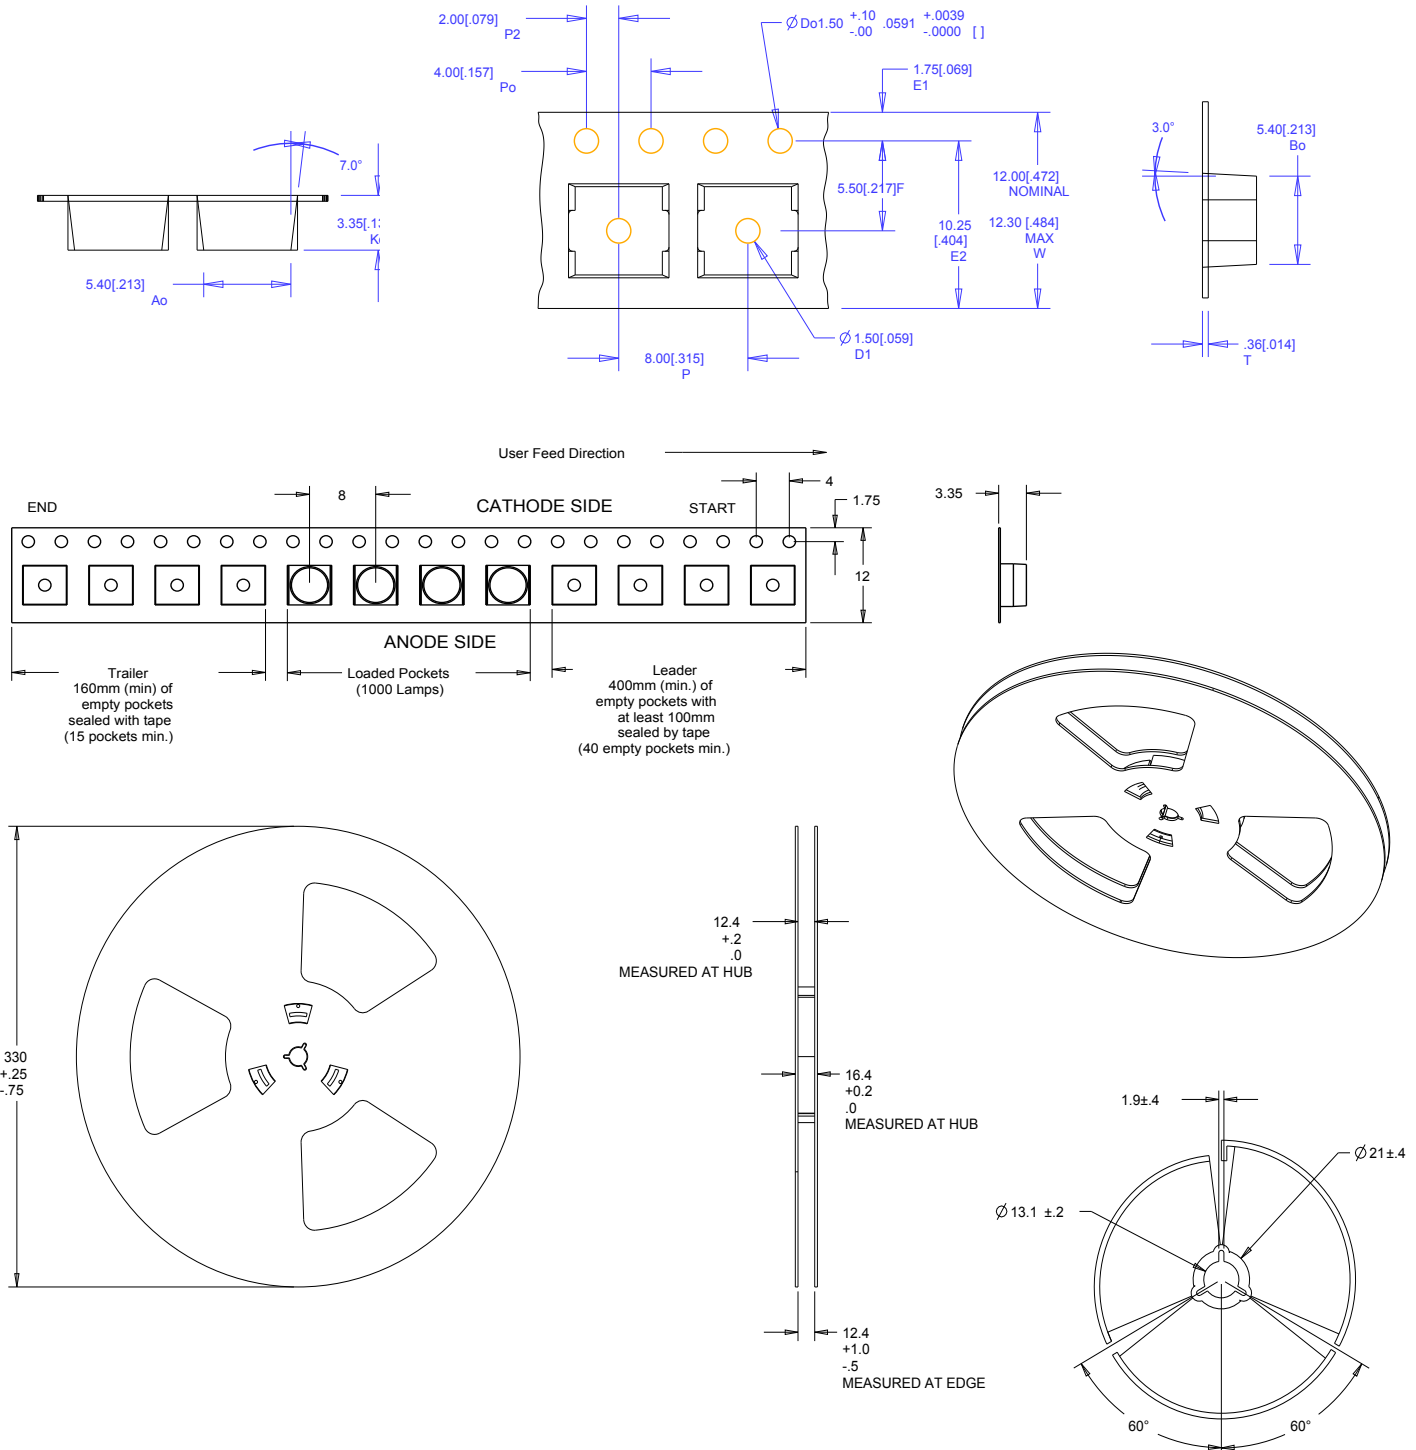


## PACKAGING

**Unpackaged Reel**

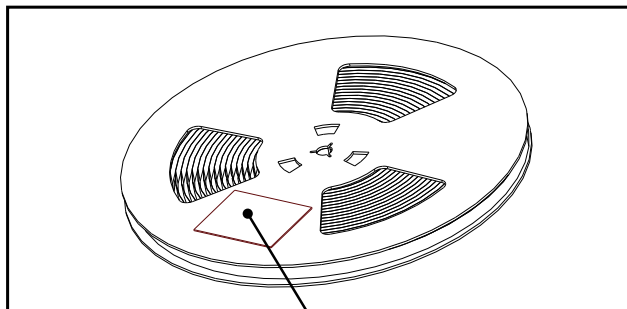

Label with Cree Bin Code, Qty, Reel ID


**Packaged Reel**

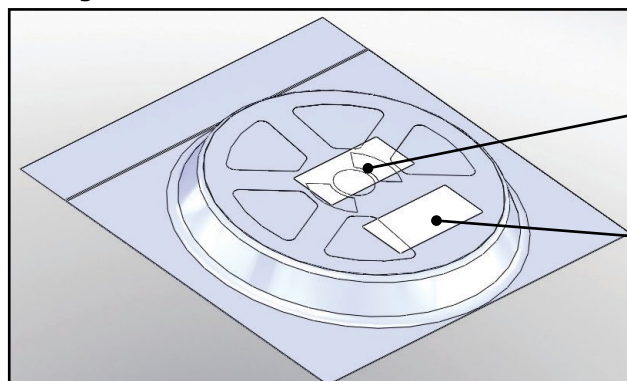

Label with Cree Order Code, Qty, Reel ID, PO #

Label with Cree Bin Code, Qty, Reel ID

**Boxed Reel**

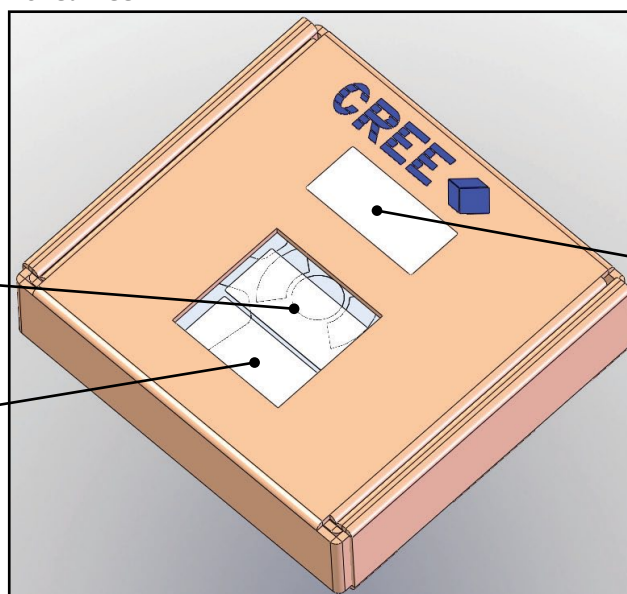

Label with Cree Order Code, Qty, Reel ID, PO #

Label with Cree Bin Code, Qty, Reel ID

Patent Label

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Cree, Inc.:

[XMLBWT-00-0000-000PS50E8](#) [XMLBWT-00-0000-000US30Z8](#) [XMLBWT-02-0000-000HT40Z5](#) [XMLBWT-02-0000-000US60Z7](#) [XMLBWT-00-0000-000HT20F8](#) [XMLBWT-02-0000-000US50E8](#) [XMLBWT-00-0000-000LT30Z7](#) [XMLBWT-00-0000-000U20E1](#) [XMLBWT-00-0000-000HT30Z7](#) [XMLBWT-02-0000-000HT20Z8](#) [XMLBWT-02-0000-000HT30Z7](#) [XMLBWT-00-0000-000US60E7](#) [XMLBWT-02-0000-000US30F8](#) [XMLBWT-02-0000-000LT50E4](#) [XMLBWT-02-0000-000PS30E8](#) [XMLBWT-02-0000-000PS40Z7](#) [XMLBWT-02-0000-000US30E8](#) [XMLBWT-02-0000-000US40Z7](#) [XMLBWT-00-0000-000LT40F4](#) [XMLBWT-02-0000-000LT20E7](#) [XMLBWT-02-0000-000LT40E5](#) [XMLBWT-02-0000-000LT40F4](#) [XMLBWT-02-0000-000LT40F6](#) [XMLBWT-02-0000-000LT20Z6](#) [XMLBWT-00-0000-000LT40E4](#) [XMLBWT-00-0000-000US40F8](#) [XMLBWT-00-0000-000US40Z8](#) [XMLBWT-02-0000-000T50E2](#) [XMLBWT-02-0000-000T6053](#) [XMLBWT-02-0000-000HS60F8](#) [XMLBWT-00-0000-000US30F8](#) [XMLBWT-00-0000-000T6051](#) [XMLBWT-00-0000-000LT20E6](#) [XMLBWT-00-0000-000LT20Z6](#) [XMLBWT-00-0000-000LT20Z7](#) [XMLBWT-00-0000-000LT40E5](#) [XMLBWT-00-0000-000LS60E8](#) [XMLBWT-02-0000-000T5050](#) [XMLBWT-02-0000-000HT20F6](#) [XMLBWT-02-0000-000LS60F8](#) [XMLBWT-02-0000-000LT30F6](#) [XMLBWT-00-0000-000LT20F7](#) [XMLBWT-02-0000-000US40E8](#) [XMLBWT-02-0000-000US50E7](#) [XMLBWT-02-0000-000US50F8](#) [XMLBWT-02-0000-000HT20Z7](#) [XMLBWT-02-0000-000LT20E8](#) [XMLBWT-02-0000-000LT20F7](#) [XMLBWT-00-0000-000US40Z7](#) [XMLBWT-00-0000-000US50E7](#) [XMLBWT-02-0000-000HT20F7](#) [XMLBWT-02-0000-000LT40E6](#) [XMLBWT-02-0000-000LT40Z5](#) [XMLBWT-02-0000-000PS40Z8](#) [XMLBWT-02-0000-000US40E7](#) [XMLBWT-00-0000-000HT40Z5](#) [XMLBWT-02-0000-000U20E2](#) [XMLBWT-02-0000-000LT30F7](#) [XMLBWT-02-0000-000LT40F5](#) [XMLBWT-00-0000-000US40E8](#) [XMLBWT-02-0000-000LT30Z6](#) [XMLBWT-02-0000-000PS40E8](#) [XMLBWT-02-0000-000U2053](#) [XMLBWT-00-0000-000LT20E7](#) [XMLBWT-00-0000-000LT30Z6](#) [XMLBWT-02-0000-000LT50F5](#) [XMLBWT-00-0000-000PS50E7](#) [XMLBWT-02-0000-000T50E1](#) [XMLBWT-02-0000-000T6051](#) [XMLBWT-02-0000-000HT30E6](#) [XMLBWT-02-0000-000HT30E7](#) [XMLBWT-02-0000-000LT30E5](#) [XMLBWT-02-0000-000PS30F8](#) [XMLBWT-02-0000-000PS40E7](#) [XMLBWT-00-0000-000HS60E8](#) [XMLBWT-00-0000-000HS60Z8](#) [XMLBWT-00-0000-000HT20F6](#) [XMLBWT-00-0000-000LT30F7](#) [XMLBWT-02-0000-000HT20F8](#) [XMLBWT-02-0000-000HT30F6](#) [XMLBWT-02-0000-000LT20Z7](#) [XMLBWT-02-0000-000LT40E3](#) [XMLBWT-02-0000-000PS50Z7](#) [XMLBWT-02-0000-000PS60Z7](#) [XMLBWT-02-0000-000HT20Z6](#) [XMLBWT-02-0000-000PS30Z8](#) [XMLBWT-02-0000-000PS50E8](#) [XMLBWT-00-0000-000LT60E3](#) [XMLBWT-02-0000-000LT50E3](#) [XMLBWT-02-0000-000HT20E6](#) [XMLBWT-00-0000-000HT30F7](#) [XMLBWT-00-0000-000HT30Z5](#) [XMLBWT-00-0000-000HT20E8](#) [XMLBWT-00-0000-000US50E8](#) [XMLBWT-02-0000-000U2051](#) [XMLBWT-02-0000-000HS60E8](#) [XMLBWT-00-0000-000LT20F8](#) [XMLBWT-00-0000-000LT40Z5](#) [XMLBWT-00-0000-000LT50E5](#) [XMLBWT-00-0000-000PS30E8](#)