# MORNSUN®

### 5W, AC-DC converter



## **FEATURES**

- Ultra-wide 85 305VAC and 100 430VDC input voltage range
- 1 x 1 inch compact size
- Operating ambient temperature range: -40°C to +85°C
- Up to 81.5% efficiency
- No-load power consumption 0.1W
- 5000m altitude application
- Plastic case meets UL94V-0 flammability
- EMI performance meets CISPR32/EN55032 CLASS B, EN55014

LD05-23BxxR2 series AC-DC converters is one of Mornsun's compact size power converters. It features ultra-wide AC input and at the same time accepts DC input voltage, low power consumption, high efficiency, high reliability, reinforced isolation. It offers good EMC performance compliant to IEC/EN61000-4 and CISPR32/EN55032 and meets IEC/EN/UL62368/EN60335/EN61558 standards. The converters are widely used in industrial, power, home appliances, instrumentation, communication and civil applications. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

Certification	Part No.*	Output Power	Nominal Output Voltage and Current	Efficiency at 230VAC (%) Typ.	Capacitive Load (uF) Max.
	LD05-23B03R2		3.3V/1515mA	71.5	4000
	LD05-23B05R2		5V/1000mA	77.5	3000
	LD05-23B09R2		9V/555mA	80.5	1200
UL/EN/IEC	LD05-23B12R2	5W	12V/416mA	80.5	1200
	LD05-23B15R2		15V/333mA	81.5	680
	LD05-23B24R2		24V/208mA	81.5	220

Note: \* Use suffix "A2S" for chassis and suffix "A4S" for DIN-Rail mounting.

### Input Specifications

Input specifications					
Item	Operating Conditions	Min.	Тур.	Max.	Unit
Input Voltage Range	AC input	85		305	VAC
lipu voliage kange	DC input	100		430	VDC
Input Frequency		47		63	Hz
Input Current	115VAC			0.13	- A
	230VAC			0.07	
	115VAC		15		
Inrush Current	230VAC		25		
Leakage Current	277VAC/50Hz	0.25mA RMS Max.			
Recommended External Input Fuse (The act		A, slow-blov ual use nee to the appli	ds to be se		
Hot Plug			Unavail	able	

<b>Output Specifications</b>					
Item	Operating Conditions	Min.	Тур.	Max.	Unit
	3.3V output		±3		
Output Voltage Accuracy	others		±2		%
Line Regulation	Full load		±0.5		70
Load Regulation	0%-100% load		±l		

**MORNSUN**<sup>®</sup>

#### MORNSUN Guangzhou Science & Technology Co., Ltd.

2022.04.26-A/5 Page 1 of 6

## AC/DC Converter LD05-23BxxR2 Series

## MORNSUN®

Ripple & Noise*	20MHz bandwidth (peak-to-peak value)		50	100	mV	
Stand-by Power Consumption	230VAC		0.10		W	
Temperature Coefficient	mperature Coefficient		±0.02		% <b>/</b> ℃	
Short Circuit Protection	Hiccup, continuous, se			us, self-reco	overy	
Over-current Protection		≥130%lo, self-recovery				
	3.3/5VDC output		≤7.5VDC			
	9VDC output	≤15VDC				
Over-voltage Protection	12VDC output		≤16VDC			
	15VDC output	≤20VDC				
	24VDC output	≤30VDC				
Minimum Load		0			%	
11.1 Jaco <b>P</b> ara	115VAC input		5			
Hold-up Time	230VAC input		50		ms	

Note: \* The "Tip and barrel method" is used for ripple and noise test, output parallel 10uF electrolytic capacitor and 1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information.

General Spe	ecifications							
ltem		Operating Condition	S	Min.	Тур.	Max.	Unit	
Isolation	Input-Output	Electric Strength Test	for 1min, leakage current <5mA	4000			VAC	
Operating Tempe	rature			-40		+85	Ĉ	
Storage Temperat	ure			-40		+105		
Storage Humidity						+95	%RH	
O a lata da a Tanan an	- <b>b</b>	Wave-soldering			<b>260 ± 5℃; †</b>	ime: 5 - 10s		
Soldering Tempero	ature	Manual-welding			360 ± 10°C; time: 3 - 5s			
Switching Frequer	псу				65		kHz	
		<b>-40</b> ℃ to -25℃		3.0				
		<b>+50℃ to +70</b> ℃	3.3V	1.75			1	
		<b>+55℃ to +70℃</b>	5V/9V/12V	2.33			<b>%/</b> ℃	
		<b>+60℃ to +70</b> ℃	15V/24V	3.5				
Power Derating		<b>+70℃ to +85</b> ℃	3.3V	1.67				
			Others	1.0				
		85VAC - 100VAC		1.0			%/VAC	
		277VAC - 305VAC		0.54				
		2000m - 5000m		6.7				
Safety Standard				IEC/UL6236 Approval &	-	-	5-1 Safety	
Safety Class				CLASS II				
MTBF				MIL-HDBK-2	17F@25℃ >	2,602,000 h		
Designed Life		230VAC	Ta: 25℃ 100% load	>130x10 <sup>3</sup> h				
Designed Life		ZOUVAC	Ta: 55℃ 100% load	>41x10 <sup>3</sup> h				

Mechanic	al Specifications	
Case Material		Black plastic, flame-retardant and heat-resistant (UL94V-0)
	Horizontal package	25.40 x 25.40 x 17.60 mm
Dimension	A2S mounting	76.00 x 31.50 x 26.40 mm
	A4S mounting	76.00 x 31.50 x 31.00 mm
	Horizontal package	18.0g (Тур.)
Weight	A2S mounting	38.0g (Typ.)
	A4S mounting	58.0g (Тур.)
Cooling method	ł	Free air convection

**MORNSUN**<sup>®</sup>


MORNSUN Guangzhou Science & Technology Co., Ltd.



		CISPR32/EN55032	CLASS B	
<b>-</b> !	CE	EN55014-1		
Emissions		CISPR32/EN55032	CLASS B	
	RE	EN55014-1		
	ESD	IEC/EN 61000-4-2	Contact ±6KV/Air ±8KV	perf. Criteria B
	ESD	EN55014-2		perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
		EN55014-2		perf. Criteria A
EFT	IEC/EN61000-4-4	±2KV (See Fig.1 for typical application circuit)	perf. Criteria B	
	IEC/EN61000-4-4	±4KV (See Fig.2 for recommended circuit)	perf. Criteria B	
	IEC/EN61000-4-4	±4KV (See Fig.3 for recommended circuit)	perf. Criteria A	
		EN55014-2		perf. Criteria B
		IEC/EN61000-4-5	line to line ±1KV	perf. Criteria B
mmunity			(See Fig.1 for typical application circuit)	pen. enicid b
		IEC/EN61000-4-5	line to line ±2KV	perf. Criteria B
	Surge		(See Fig.2 for recommended circuit)	P
		IEC/EN61000-4-5	line to line $\pm 2$ KV/line to ground $\pm 4$ KV	perf. Criteria A
			(See Fig.3 for recommended circuit)	
	EN55014-2		perf. Criteria B	
	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A	
	CS	EN55014-2		perf. Criteria A
	Voltage dip, short interruption	IEC/EN61000-4-11	0%, 70%	perf. Criteria B
	and voltage variation	EN55014-2		perf. Criteria B


Note: When the output terminal of the product needs to be connected to PE through a Y capacitor, or close to the metal frame, please refer to the Fig. 3 for recommended circuit.

### Product Characteristic Curve

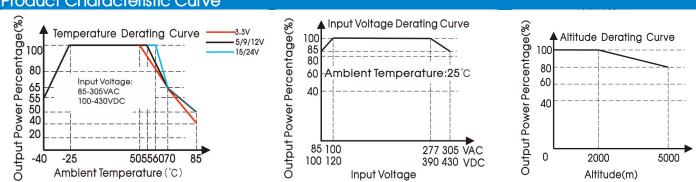


Note: ① With an AC input between 85-100V/277-305VAC and a DC input between 100-120V/390-430VDC, the output power must be derated as per temperature derating curves;

2 This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

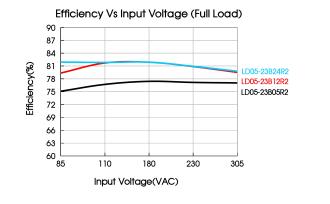

**MORNSUN®** 

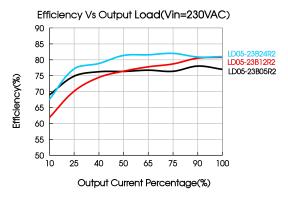

MORNSUN Guangzhou Science & Technology Co., Ltd.

### Design Reference

1. Typical application

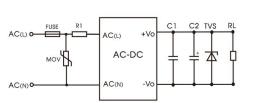


Fig. 1: Typical circuit diagram

Part No.	C1(uF)	C2(uF)	FUSE	RI	TVS	MOV
LD05-23B03R2		150			SMBJ7.0A	
LD05-23B05R2	-	150			SMBJ7.0A	
LD05-23B09R2		120	1A/300V,	12Ω/3W	SMBJ12A	0101/250
LD05-23B12R2	I	120	slow-blow, required	(wire-wound resistor, required)	SMBJ20A	\$10K350
LD05-23B15R2	1	120	, equilou	readined, required,	SMBJ20A	
LD05-23B24R2	-	68			SMBJ30A	

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a Capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.

### 2. EMC compliance recommended circuit





Fig. 2: EMC application circuit with higher requirements

Component	Recommended value
MOV	S14K350
RI	33 $\Omega$ /3W (wire-wound resistor, required)
FUSE	2A/300V, slow-blow, required

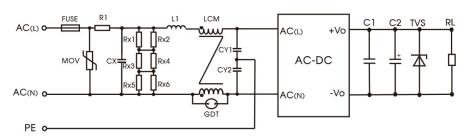

#### Fig. 3: Recommended circuit for class I equipment

(Recommended when the output terminal of the product needs to be connected to PE or connected to PE through a Y capacitor)

Component	Recommended value	
FUSE	2A/300V, slow-blow, required	
MOV	S14K350	
CX	334K/305VAC	
RI	33 Ω/3W (wire-wound resistor, required)	
LI	1.2mH/0.3A	
CY1/CY2	1nF/400VAC	
GDT	300V/1KA	
LCM	20 mH, P/N: FL2D-10-203 (MORNSUN) is recommended	
Note: Rx1/Rx2/Rx3/Rx4/Rx5/Rx6 is the b	leeder resistance of CX, and the recommended resistance value is $1.5M \Omega / 150VDC$ .	

#### 3. For additional information please refer to application notes on <u>www.mornsun-power.com</u>.

**MORNSUN**<sup>®</sup>


MORNSUN Guangzhou Science & Technology Co., Ltd.

# MORNSUN®


2022.04.26-A/5 Page 4 of 6

## MORNSUN®

### **Dimensions and Recommended Layout**

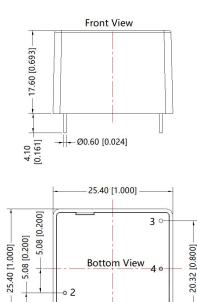

2.54 [0.100] - 20.32 [0.800] -





Pin-Out		
Pin	Function	
1	AC(N)	
2	AC(L)	
3	No pin	
4	-Vo	
5	+Vo	

Note:

Unit: mm[inch] Pin diameter tolerances: ±0.10[±0.004] General tolerances: ±0.50[±0.020]

### A2S Dimensions

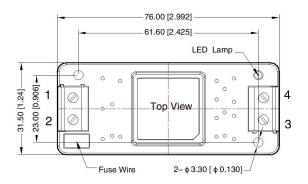



Pin	–Out
Pin	Function
1	AC(N)
2	AC(L)
3	–Vo
4	+Vo

Note: Unit: mm[inch] Wire range: 24–12 AWG Tightening torque: Max 0.4 N·m General tolerances:  $\pm 1.00[\pm 0.039]$ 


**MORNSUN®** 


MORNSUN Guangzhou Science & Technology Co., Ltd.

2022.04.26-A/5 Page 5 of 6

## AC/DC Converter LD05-23BxxR2 Series

### A4S Dimensions

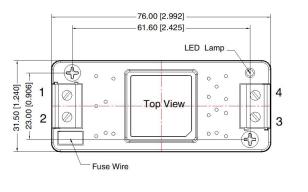

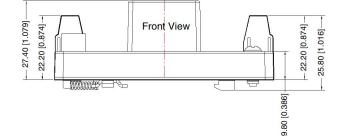

# **MORNSUN**<sup>®</sup>

THIRD ANGLE PROJECTION

Pin-Out	
Pin	Function
1	AC(N)
2	AC(L)
3	–Vo
4	+Vo

Note: Unit: mm[inch] Wire range: 24–12 AWG Tightening torque: Max 0.4 N·m Mounting rail: TS35, rail needs to connect safety ground General tolerances:  $\pm 1.00[\pm 0.039]$ 

#### Note:

- 1. For additional information on Product Packaging please refer to <u>www.mornsun-power.com</u>. Packaging bag number: 58220096 (Horizontal package); 58220022 (A2S/A4S package);
- 2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- 3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75% with nominal input voltage and rated output load;
- 4. All index testing methods in this datasheet are based on our company corporate standards;
- 5. We can provide product customization service, please contact our technicians directly for specific information;
- 6. Products are related to laws and regulations: see "Features" and "EMC";
- 7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

## Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. ChinaTel: 86-20-38601850Fax: 86-20-38601272E-mail: info@mornsun.cnwww.mornsun-power.com

**MORNSUN®** 

#### MORNSUN Guangzhou Science & Technology Co., Ltd.

2022.04.26-A/5 Page 6 of 6