AC/DC 35W Enclosed Switching Power Supply LM35-23BxxR2(-C, -Q, -CQ, -QQ, -CQQ) Series





















FEATURES

- Universal 80 305VAC or 100 430VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- ullet Operating ambient temperature range: -40°C to +85°C
- Low standby power consumption, high efficiency
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- OVC III (meet EN62477)
- Operating altitude up to 5000m

LM35-23BxxR2 series is the ultra-small Mornsun second-generation new industrial standard enclosed power supply, which has innovated the industrial power supply standard from the aspect of dimension, performance, technology and structure. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC performance and meet IEC/EN6 1000-4, CISPR32/EN55032, UL/IEC/EN/BS EN62368, EN60335, EN61558, EN62477, GB4943 standards and they are widely used in areas of industrial, street light control, electricity, security, telecommunications, smart home etc. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

| Selection | Guide | | | | | |
|-------------------|--------------|---------------------|---|--|-------------------------------|---------------------------|
| Certification | Part No.* | Output Power (W) | Nominal Output Voltage and Current (Vo/lo) | Output Voltage Adjustable Range (V) | Efficiency at 230VAC (%) Typ. | Capacitive Load (uF) Max. |
| | LM35-23B05R2 | 35 | 5V/7A | 4.75-5.75 | 86.0 | 8000 |
| | LM35-23B12R2 | 36 | 12V/3A | 11.4-13.8 | 87.5 | 1500 |
| UL/IEC/CCC | LM35-23B15R2 | 36 | 15V/2.4A | 14.25-17.25 | 87.5 | 1000 |
| /EN/BIS | LM35-23B24R2 | 36 | 24V/1.5A | 22.8-27.6 | 88.5 | 750 |
| | LM35-23B36R2 | 36 | 36V/1A | 34.2-41.4 | 88.5 | 330 |
| | LM35-23B48R2 | 38.4 | 48V/0.8A | 43.2-52.8 | 89.5 | 220 |
| UL/IEC/ CCC/EN | LM35-23B54R2 | 36 | 54V/0.67A | 48.6-59.4 | 89.5 | 100 |

Note: *1. Use suffix "C" for terminal with protective cover, suffix "Q" for bottom conformal coating and "QQ" for both sides conformal coating;

2. The product picture is for reference only. For details, please refer to the actual product.

| Input Specifications | ; | | | | | |
|-------------------------|----------------------|------------|------|-------------|------|------|
| Item | Operating Conditions | | Min. | Тур. | Max. | Unit |
| Innuit Valtaga Danga | AC input | | 80 | - | 305 | VAC |
| Input Voltage Range | DC input | | 100 | | 430 | VDC |
| Input Voltage Frequency | | | 47 | - | 63 | Hz |
| Innuit Current | 115VAC | | | _ | 0.8 | A |
| Input Current | 230VAC | | | _ | 0.6 | |
| Inrush Current | 115VAC | Cold start | | 30 | | |
| iniusii Cunem | 230VAC | Cold stail | | 50 | | |
| Leakage Current | 277VAC | | | <0.75mA | | |
| Hot Plug | | | | Unavailable | | |

| Output Specifications | | | | | | | |
|----------------------------|----------------------|-------------------------|------|------|------|------|--|
| Item | Operating Conditions | | Min. | Тур. | Max. | Unit | |
| | F | 5V | - | ±2 | | | |
| Output Voltage Accuracy | Full load range | 12V/15V/24V/36V/48V/54V | | ±1 | | % | |
| Line Regulation Rated load | | | | ±0.5 | | | |

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

AC/DC 35W Enclosed Switching Power Supply LM35-23BxxR2(-C, -Q, -CQ, -QQ, -CQQ) Series



| Load Dogulation | 00/ 1000/ la mal | 5V | | ±1 | - | % |
|----------------------------|--|-------------------------|---------------------------------------|-----------------------|------------|------------------|
| Load Regulation | 0% - 100% load | 12V/15V/24V/36V/48V/54V | | ±0.5 | | % |
| | | 5V | | 60 | 150 | |
| Discola O Naisas | 230VAC, Rated load; 20MHz bandwidth (peak-to-peak value) | 12V/15V | | 60 | 150 | |
| Ripple & Noise* | | 24V | | 100 | 150 | mV |
| | | 36V/48V/54V | | 100 | 240 | |
| Temperature Coefficient | | | | ±0.03 | _ | %/℃ |
| Minimum Load | | | 0 | - | - | % |
| Stand-by Power Consumption | | | | | 0.5 | W |
| Holdun Timo | 115VAC | | | 6 | - | ms |
| Hold-up Time | 230VAC | | | 35 | - | 1113 |
| Short Circuit Protection | Recovery time <3s after the short circuit disappear. | | Hiccup, continuous, self-recovery | | | covery |
| Over-current Protection | 230VAC, Rated load | | 120% - 200% Io, hiccup, self-recovery | | | ecovery |
| | 5V | | ≤7.3VDC | | | |
| | 12V 15V | | | ≤16.2VDC ≤21.75VDC | | |
| | | | | | | |
| Over-voltage Protection | 24V | | < 33 6\/1\/(` | | self-recov | or clamp, ⁄er |
| | 36V | | ≤48.6VDC | | | |
| | 48V | | ≤60.0VDC | | | |
| | 54V | | ≤70.0VDC | | 1 | |

Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.

| Item | | Operating Conditions | | Min. | Тур. | Max. | Unit |
|---------------------|----------------|--|----------------|-----------------------|---|------|-------------|
| | Input - 🖶 | Electric strength test for 1min., leakage current <5mA | | 2000 | _ | _ | VAC |
| Isolation | Input - output | | | 4000 | _ | | |
| | Output - | _ | 1250 | | | | |
| Insulation | Input - | | | 100 | | | |
| | Input - output | At 500VDC | At 500VDC | | | | M Ω |
| Resistance | Output - | | 100 | | _ | | |
| Operating Ter | mperature | | | -40 | _ | +85 | •6 |
| Storage Temp | erature | | | -40 | - | +85 | °C |
| Operating Hu | ımidity | N | | 20 | - | 90 | %RH |
| Storage Humidity | | Non-condensing | | | | 95 | * %KH |
| Switching Frequency | | | | - | 95 | - | kHz |
| | | Operating temperature | -40℃ to -30℃ | 5 | | | %/ ℃ |
| | | | +50°C to +70°C | 2.5 | _ | _ | |
| Power Deratir | ng | derating | +70°C to +85°C | 1.33 | | _ | |
| | | Input voltage derating | 85VAC-100VAC | 2 | _ | _ | %/VAC |
| Safety Standard | | 5V/12V/15V/24V/36V/48V 54V | | safety ap BS EN/EN | UL/IEC62368-1, GB4943.1, IS13252 (Part 1) safety approved & BS EN/EN60335-1, BS EN/EN61558-1, BS EN/EN62368-1 (report); Design refer to EN62477-1 | | |
| | | | | approved BS EN/EN | UL/IEC62368-1, GB4943.1 safety approved & BS EN/EN60335-1, BS EN/EN61558-1, BS EN/EN62368-1 (report); Design refer to EN62477-1 | | |
| Safety Class | | | | CLASS I | CLASS I | | |
| MTBF | | MIL-HDBK-217F@25℃ | | >300,000 | >300,000 h | | |

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

AC/DC 35W Enclosed Switching Power Supply LM35-23BxxR2(-C, -Q, -CQ, -QQ, -CQQ) Series





| Mechanical Specifications | | | | |
|---------------------------|--------------------------|--|--|--|
| Case Material | Metal (AL5052, SGCC) | | | |
| Dimensions | 99.00 x 65.00 x 30.00 mm | | | |
| Weight | 150g (Typ.) | | | |
| Cooling Method | Free air convection | | | |

| Emissions | CE | CISPR32/EN55032 | CLASS B | |
|-----------|---|------------------|-----------------------------------|------------------|
| | | • | | |
| | RE | CISPR32/EN55032 | CLASS B | |
| Immunity | ESD | IEC/EN61000-4-2 | Contact ±6KV/Air ±8KV | perf. Criteria A |
| | RS | IEC/EN61000-4-3 | 10V/m | perf. Criteria A |
| | EFT | IEC/EN61000-4-4 | ±4KV | perf. Criteria A |
| | Surge | IEC/EN61000-4-5 | line to line ±2KV/line to PE ±4KV | perf. Criteria A |
| | CS | IEC/EN61000-4-6 | 10 Vr.m.s | perf. Criteria A |
| | Voltage dip, short interruption and voltage variation | IEC/EN61000-4-11 | 0%, 70% | perf. Criteria B |

Note: If the EMC performance needed to be improved, please add EMC filter FC-L03Wx series (see wiring diagram 1). Details of specific indicators please refer to filter datasheet.


Product Characteristic Curve






Note: 1. With an AC input voltage between 80 -100VAC and a DC input between 100 -140VDC the output power must be derated as per the temperature derating curves:

2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

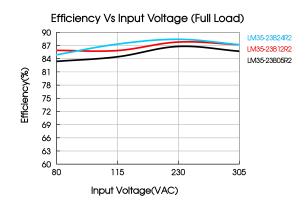

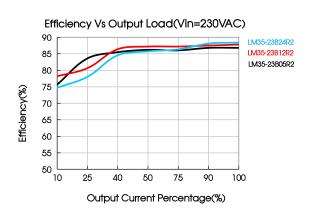



FC-L03Wx & LM35-23BxxR2 Wiring Diagram

Wiring diagram


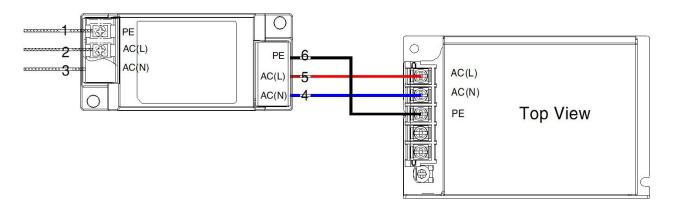


Fig. 1: EMC application circuit with higher requirement

Dimensions and Recommended Layout


LM35-23BxxR2(-Q, -QQ) Series




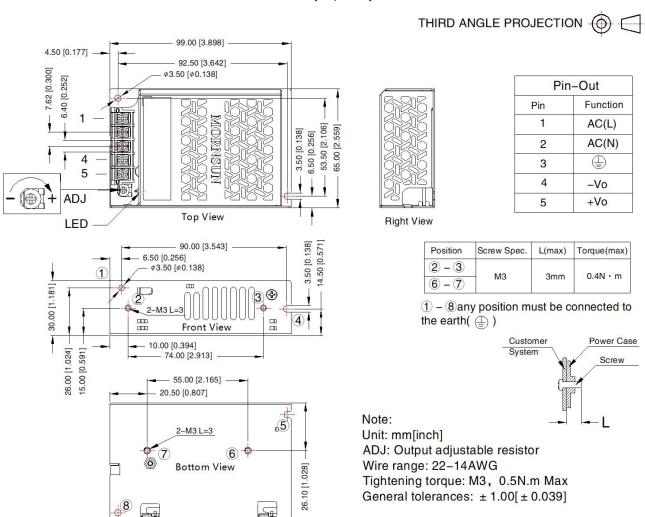


LM35-23BxxR2-C(-CQ, -CQQ) Series



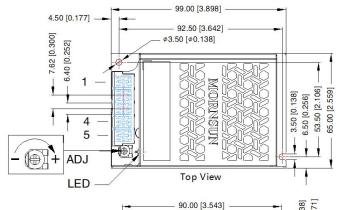






Right View

| Position | Screw Spec. | L(max) | Torque(max) |
|----------------|-------------|--------|-------------|
| 2 - 3 6 - 7 | M3 | 3mm | 0.4N • m |

1 - 8 any position must be connected to the earth(\triangle)




Note:

Unit: mm[inch]

ADJ: Output adjustable resistor

Wire range: 22-14AWG

Tightening torque: M3, 0.5N.m Max General tolerances: $\pm 1.00[\pm 0.039]$

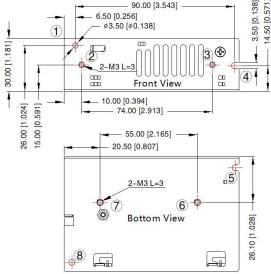

Note:

- 1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220267;
- 2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- 3. The room temperature derating of 5° C/1000m is needed for operating altitude greater than 2000m;
- 4. All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- 6. We can provide product customization service, please contact our technicians directly for specific information;
- 7. Products are related to laws and regulations: see "Features" and "EMC";
- 8. The out case needs to be connected to the earth ()of system when the terminal equipment in operating;
- 9. The output voltage can be adjusted by the ADJ, clockwise to increase;
- 10. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
- 11. The power supply is considered a component which will be installed into a final equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.