




KBU 10A/15A/25A/35A SERIES

**SINGLE PHASE 10/15/25/35AMPS.
SILICON BRIDGE
RECTIFIERS**

**Voltage Range
50 to 1000 Volts
Current
10/15/25/35 Amperes**

FEATURES

- UL Recognized File # E-230084
- Surge overload rating - 220 ~ 400 amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- Plastic material has Underwriters Laboratory Flammability classification 94V-0
- Mounting Position:Any

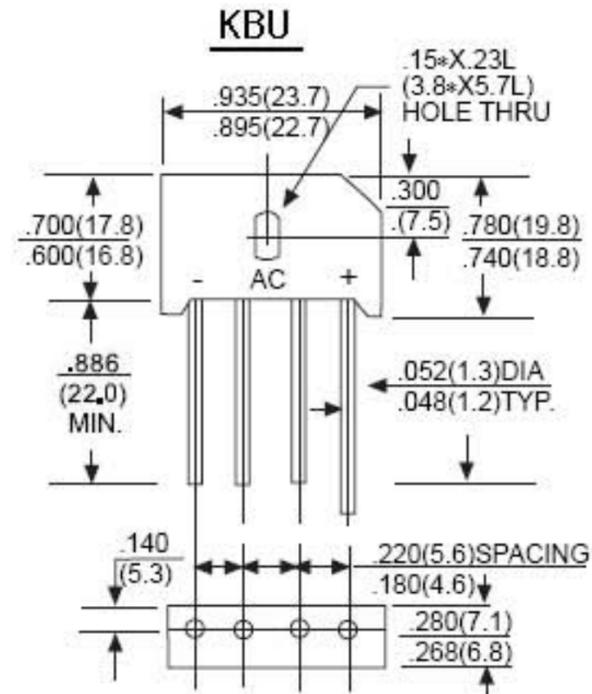

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 50Hz, resistive or inductive load.
For capacitive load, derate current by 20%

		KBU	KBU	KBU	KBU	KBU	KBU	KBU	UNIT
		10005	1001	1002	1004	1006	1008	1010	
		15005	1501	1502	1504	1506	1508	1510	
		25005	2501	2502	2504	2506	2508	2510	
		35005	3501	3502	3504	3506	3508	3510	
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward (with heatsink Note 2) Rectified Current@T _c = 100°C(without heatsink)	I _{F(AV)}	15.0 3.2							A
Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load (JEDEC Method)	I _{FSM}	10A 15A 25A 35A 250 300 400 400							A
Maximum Instantaneous Forward Voltage Drop Per Leg@5.0A/7.5A/12.5A/17.5A	V _F	1.1							V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I _R	T _J = 25°C T _J = 125°C 10 500							UA
I ² t Rating for fusing (t<8.3ms)	I ² t	240							A ² S
Typical Junction Capacitance per element (Note 1)	C _J	60							pF
Typical Thermal Resistance (Note 2)	R _{θJC}	0.8							°C/W
Operating Temperature Range	T _J	-55 to+150							°C
Storage Temperature Range	T _{STG}	-55 to+150							°C

NOTES: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
2. Device mounted on 300mm x 300mm x 1.6mm Cu Plate Heatsink.

RATING AND CHARACTERISTIC CURVES KBU 10A/15A/25A/35A SERIES



FIG.1 -MAXIMUN FORWARD SURGE CURRENT

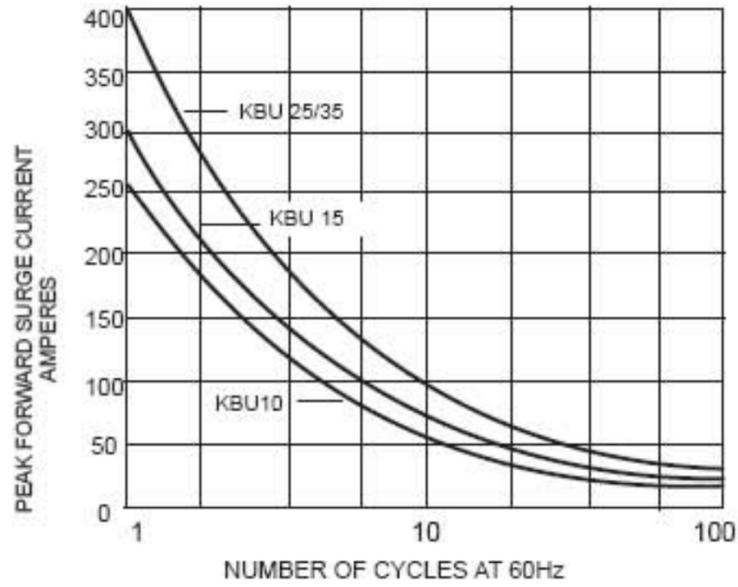


FIG.2 -DERATING CURVE
OUTPUT RECTIFIED CURRENT

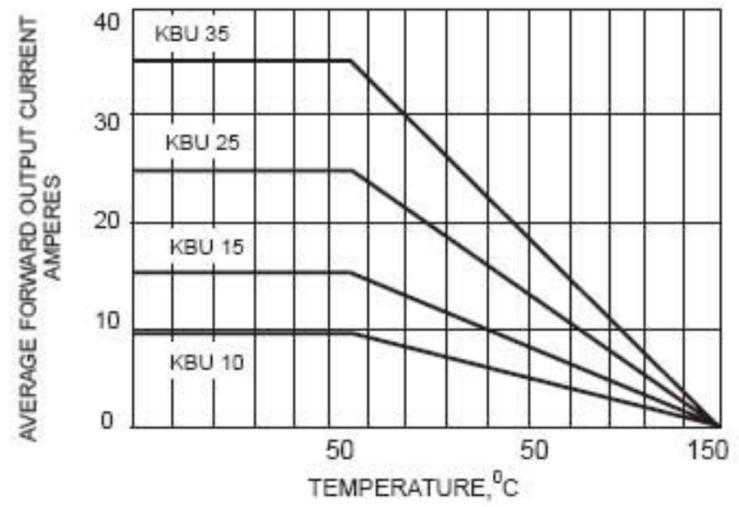


FIG.3 - TYPICAL FORWARD CHARACTERISTICS

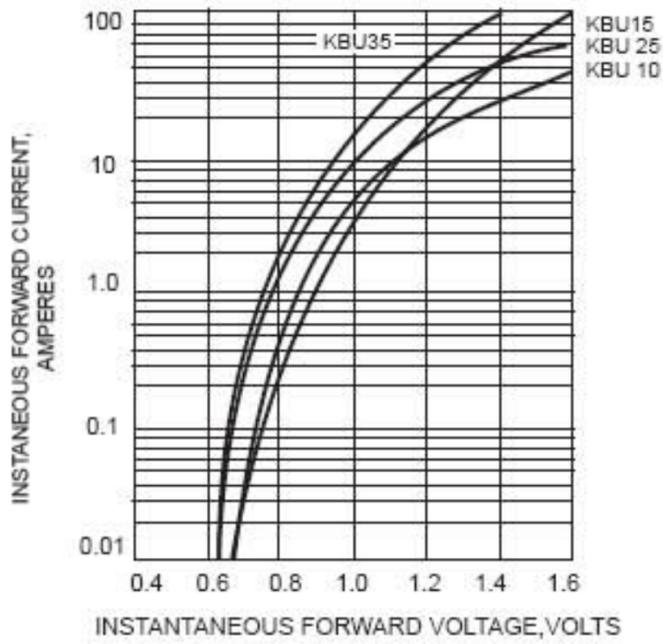


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

