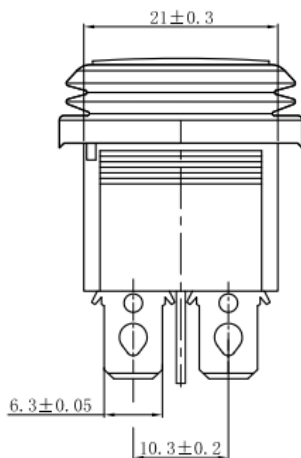
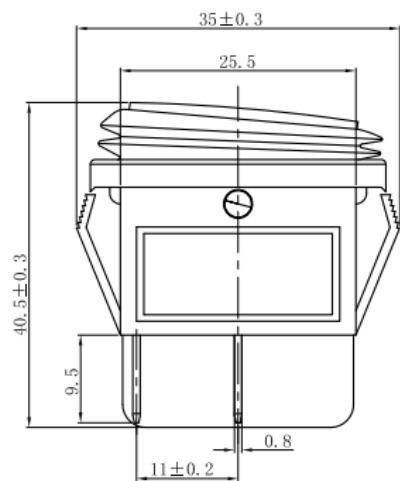


安装面板尺寸
PANEL CUT-OUT

主要技术参数、性能
The Main Technology Performance

项目 Item	参数 Parameter
电路图 Circuit	
额定电流、电压 Rated voltage Rated current	16A 250V AC 20A 125V AC
绝缘电阻 Insulated resistance	≥100MΩ
接触电阻 Contact resistance	≤50mΩ
介电强度(极间) Dielectric strength	≥1500V AC/5S
操作温度 Operating Temperature	T85
电器寿命 Electrical Life	≥10000 Cycles

版本	标示	更改描述
产品名称: 船形开关 Product Rocker Switch	产品型号: KCD2-201W Product Model	
产品料号: P/N	制图:	审核:
图纸比例: 1:1 Scale	日期:	日期:
若没有特别标示, 公差依照以下要求: X. =±0.5 .X=±0.30 .XX=±0.15 < =±2° 单位: mm		
		(第一视角法)
乐清市戴尔电子有限公司 YUEQING DAIER ELECTRON CO., LTD		

KCD2-201NW	It is 4P,ON-OFF waterproof rocker switch with lamp
KCD2-201W	It is 4P,ON-OFF waterproof rocker switch without lamp

KCD2-201NW Waterproof Led Rocker Switch datasheet below

Housing:	Nylon 66	Button:	Nylon 66
Terminal:	Brass with sliver plated	Lamp color and voltage:	Color: Red/green/yellow/blue/white Voltage:220V/12V/24V
Rating:	20A 125VAC/15A 250VAC	Housing color:	Standard black
Contact&Operation:	DPST,ON-OFF	IP Level:	IP54
Contact Resistance:	35mΩ max	Operating Temperature:	-25℃~+85℃
Insulation Resistance:	100mΩ min (500VDC)	Electrical Life:	≥ 10,000 Cycles
Dielectric strength:	1500VAC 1 minute	Mechanical Life:	≥ 100,000 Cycles
Certification:	CE, CQC, TUV, SGS	OEM or ODM:	Available

KCD	2	-	2	-	2	01	N	W	L	-	C3	-	R	B	-	220V
	特征		序号		刀数	功能	带灯状态	按钮类型	端子类型		标记		按钮颜色	外壳颜色		灯电压
	Features		Series		Poles	Function	Lamp	Actuator	Terminals		Marking		Actuator Color	Housing Color		Lamp Volt
1	Miniature		1	1 pole 1 button	01	ON-OFF	No Mark	No lamp	No Mark	Straight	C1		B 黑色Black	B 黑色Black		3V
2	Medium 2 poles		2	2 pole 1 button	02	ON-ON	N	Lens illuminated	D	Short	C2		W 白色White	W 白色White		6V
3	Medium 1 pole		21	2 pole 2 button	03	ON-OFF-ON	EN	Dot illuminated	L	Right Angle	C3		R 红色Red	R 红色Red		12V
5	Sub-Miniature		3	3 pole 1 button	11	(ON)-OFF(单复位)	No Mark	C shape	S	Screw	C4		G 绿色Green	G 绿色Green		24V
			31	3 pole 3 button	12	(ON)-(ON)(单复位)	W	Waterproof	T	Through hole	C5		Y 黄色Yellow	Y 黄色Yellow		48V
					13	(ON)-(OFF-ON)(单复位)	H	High Actuator			C6		BL 蓝色Blue	BL 蓝色Blue		110V
					23	(ON)-(OFF)-(ON)(双复位)	V	V shape			C7		O 棕色Orange	O 棕色Orange		220V
											C8		GR 灰色Gray	GR 灰色Gray		
											C9		C 咖啡色Coffee	C 咖啡色Coffee		
											C10					
											CX					